
pulse monitor stand

PC-MK-01

The pulse monitor stand is an excellent addition to a variety of backwall displays and exhibits. Use this sturdy, stand alone kiosk in a variety of situations to display your multimedia messages.

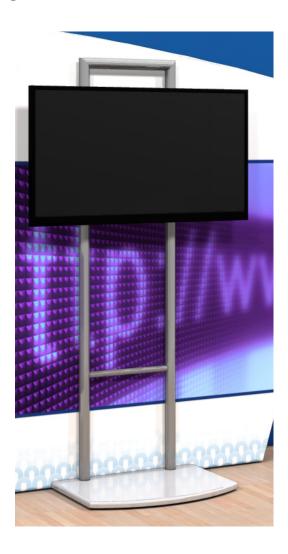

features and benefits:

- State-of-the-art snap button aluminum structure
- Frame constructed of 30mm and 50mm lightweight aluminum tubes
- Choose from four laminate base colors
- Brushed silver finish on exposed tube
- Easy step-by-step instructions
- Lifetime warranty on hardware against manufacturer defects

dimensions:

Hardware	Shipping
Assembled unit: 30"w x 78.38"h x 23.6"d 762mm(w) x 1990mm(h) x 600mm(d)	Shipping dimensions - ships in 1 case: WMC-12x6 case: 52"I x 30"w x 15"h 1320.8mm(I) x 762mm(w) x 381mm(h) Approximate shipping weight (entire kit): 70 lbs / 31.75 kgs

additional information:

Monitor mount holds max weight 50 lbs / 22.7 kgs

Monitor mount holds max size 40" / 1016mm

Base color options:











mahogany

any natur


nimlok)


Parts included		
Part Label	Qty	
Upper frame	x1	
Lower frame	x1	
Joiner	x4	
Base plates	x2	
Base	x1	
Monitor bracket	x1	

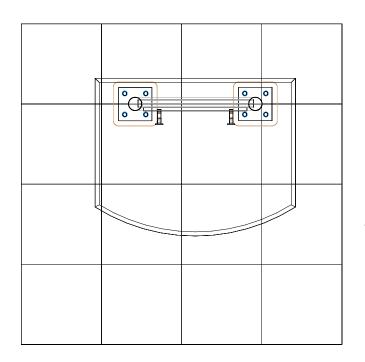

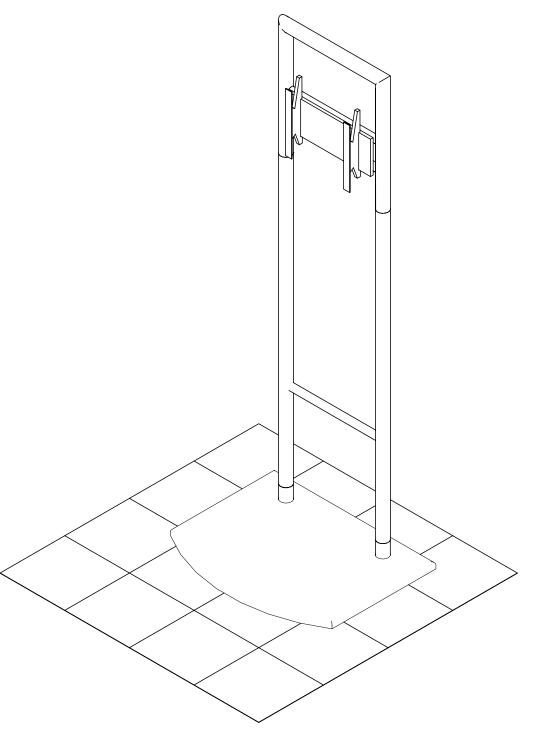


Step 1. Connect the plates to the base using four screws per plate as shown in the attachement detail below. Assure holes on tubing are facing inward.

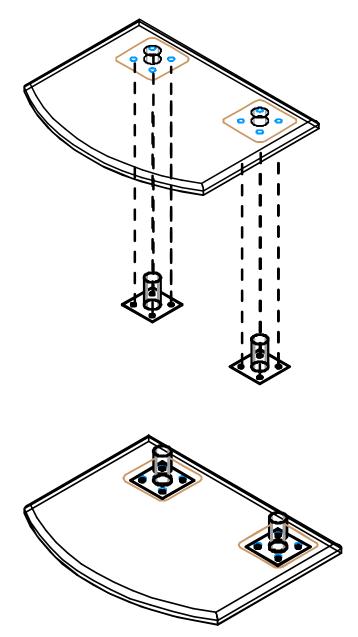


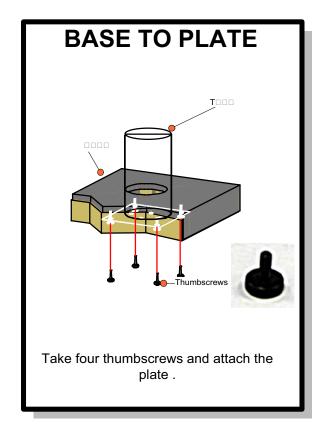


Step 2.

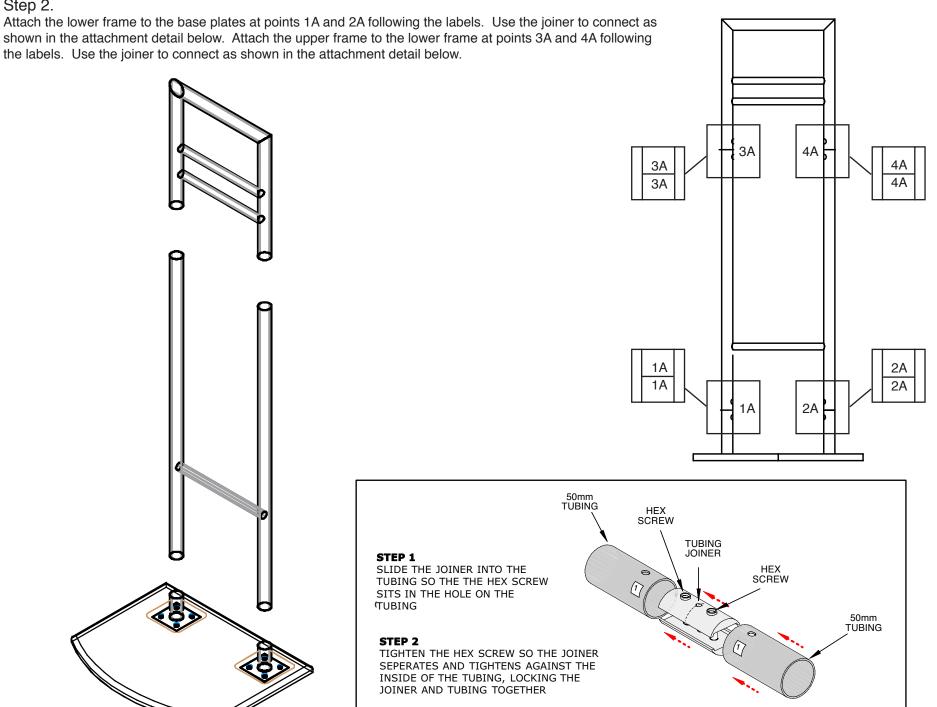

Step 3. To attach the monitor mount, put square head bolts through the back of the pre-drilled tube. Slide monitor mount onto bolts and secure with wingnuts. Position mount where desired.

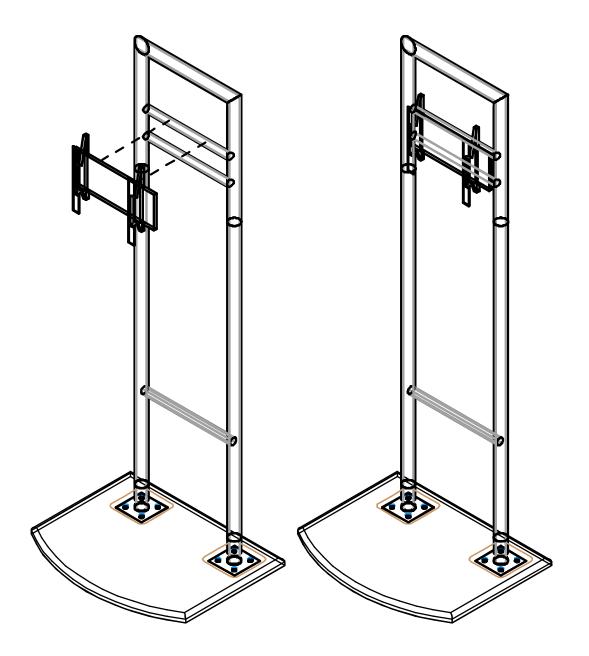

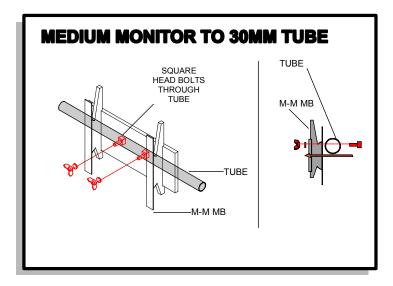

nimlok

check out these related products:



We continue to improve and modify our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.