Formulate Chip-Shaped Wall

CHIP-WALL

Formulate[™] tension fabric conference walls are lightweight, stylish solutions to your meeting space needs. Ergonomically designed, Formulate C-shaped and Serpentine-shaped walls combine the latest developments in fabric printed technology with gently curved 50mm aluminum frames to create private, cozy and stylish conference areas within any space.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- State-of-the-art 50mm curved aluminum tube frame with sturdy internal spigots
- Potato chip shaped structure
- Ideal to create a semi-private conference/ meeting area or projection wall
- Kit includes: one frame, one dye-sublimated zipper pillowcase graphic, and one wheeled molded OCE storage case
- Lifetime hardware warranty against manufacturer defects

dimensions:


Hardware	Graphic
Assembled unit: 111"w x 96"h x 61.894"d 2819mm(w) x 2438mm(h) x 1572mm(d) Approximate weight (includes graphic): 42.55 lbs / 19.3 kg	Total visual area: Inside: 179"w x 96"h 4547mm(w) x 2438mm(h) Outside: 181"w x 96"h 4597mm(w) x 2438mm(h) Single sided chip walls have inside printed only. Please be sure to include 5" bleed around the perimeter. Refer to related graphic template for more information.
Shipping	
Shipping dimensions: 1 OCE case: 18"l x 18"w x 40" up to 66"h 457mm(l) x 457mm(w) x 1016mm(h) up to 1675mm(h) Approximate shipping weight (with case): 62.55 lbs / 28.8 kg	

additional information:

Graphic material: Dye-sublimated zipper pillowcase fabric




www.american-image.com

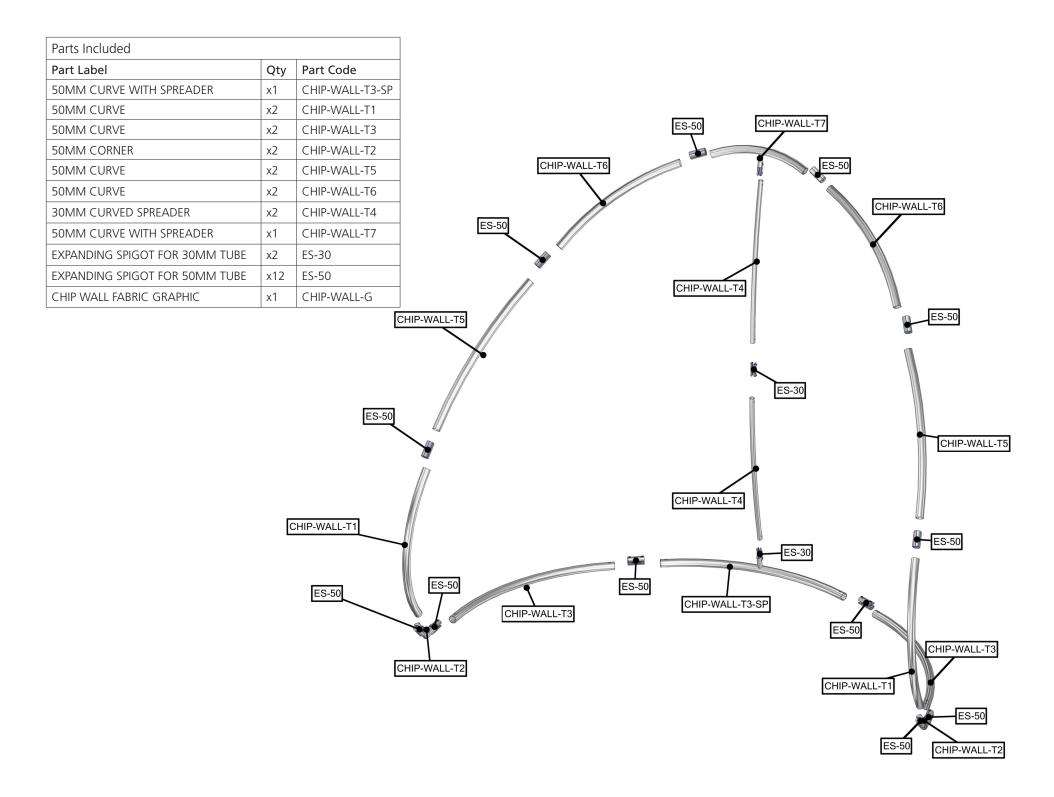



CHIP-WALL FRAME ASSEMBLY: Assemble unit by laying tubes flat on the floor. Connect the tube rails following the labels by matching number to number.


Slide joiner into tubing so hex screw sits in hole on tubinger. Tighten the hex screw so the joiner separates and tightens against the inside of the tubing, locking the joiner and tubing togther.

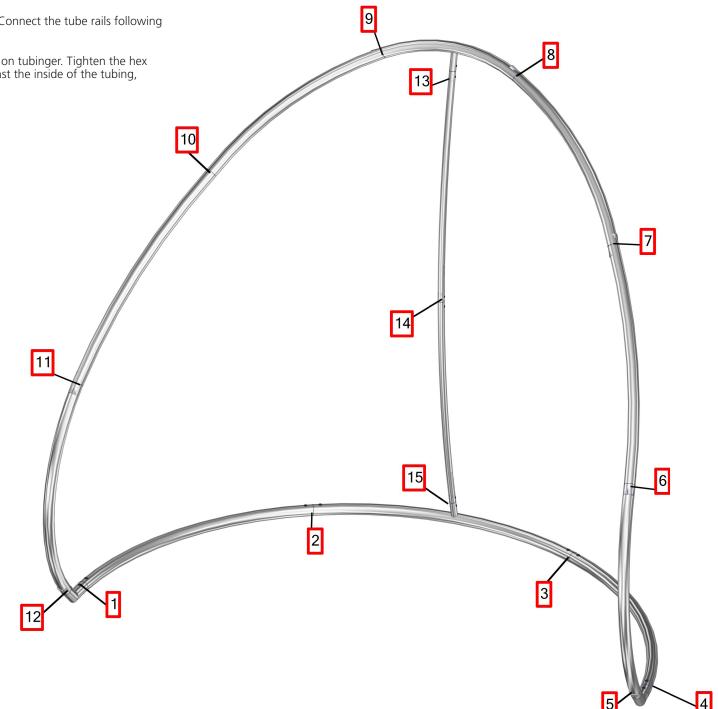

STEP 1: ASSEMBLE FRAME







STEP 2: ATTACH GRAPHIC

