## **NOTES**


Assemble central tower first, then asseble wing sections.

Flat side of saddle bracket attaches to header frame. Secure it to the horizontal, about 5" from leg, with the long pin.


Box frame attaches between bracket and header frame









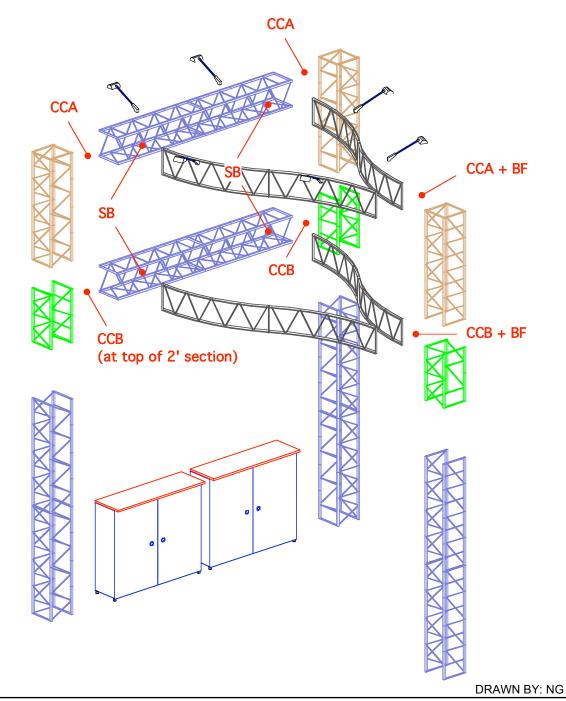



DESIGN: EZ12 EMERALD, Page 1 of 2 DATE: 4/08 REFERENCE: 20x20 © Trussworks 2008

