



www.american-image.com

PULSE display details & setup instructions

nimlok®
authorized distributor

pulse counter 03

PC-03

The pulse counter 03 is an excellent addition to a variety of backwall displays and exhibits. Use this sturdy, stand alone counter in a variety of situations to display your products and literature as well as house items inside two locking doors.



features and benefits:

- Locking doors
- Choose from four tabletop finishes and four laminate base colors
- Easy step-by-step instructions
- Lifetime warranty on hardware against manufacturer defects

dimensions:

Hardware

Counter dimensions: 64"w x 40"h x 20"d
1625.6mm(w) x 1016mm(h) x 508mm(d)

Shipping

Shipping dimensions - ships in 1 case
WMC-12x6 case:
52"l x 30"w x 15"h
1320.8mm(l) x 762mm(w) x 381mm(h)

Approximate shipping weight (entire kit):
120 lbs/54.4 kg

additional information:

Counter holds max weight 50 lbs/22.7 kg

Tabletop color options:



silver



black



mahogany



natural

Counter color options:



dove
gray



black



designer
white





fusion
maple

nimlok





pulse

| Parts included | |
|----------------|-----|
| Part Label | Qty |
| C1 | x1 |
| C2 | x1 |
| C3 | x1 |
| C4 | x1 |
| C5 | x1 |
| C6 | x1 |
| C7 | x1 |
| L180N-980 | x2 |

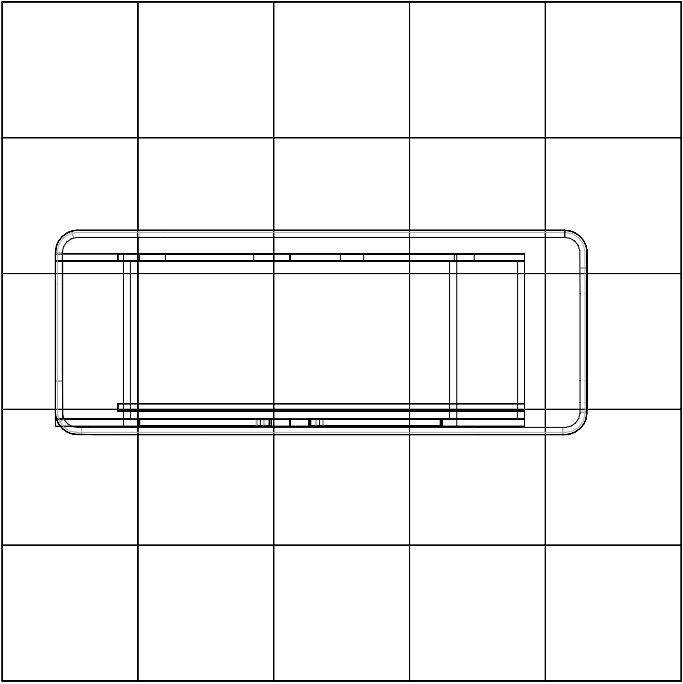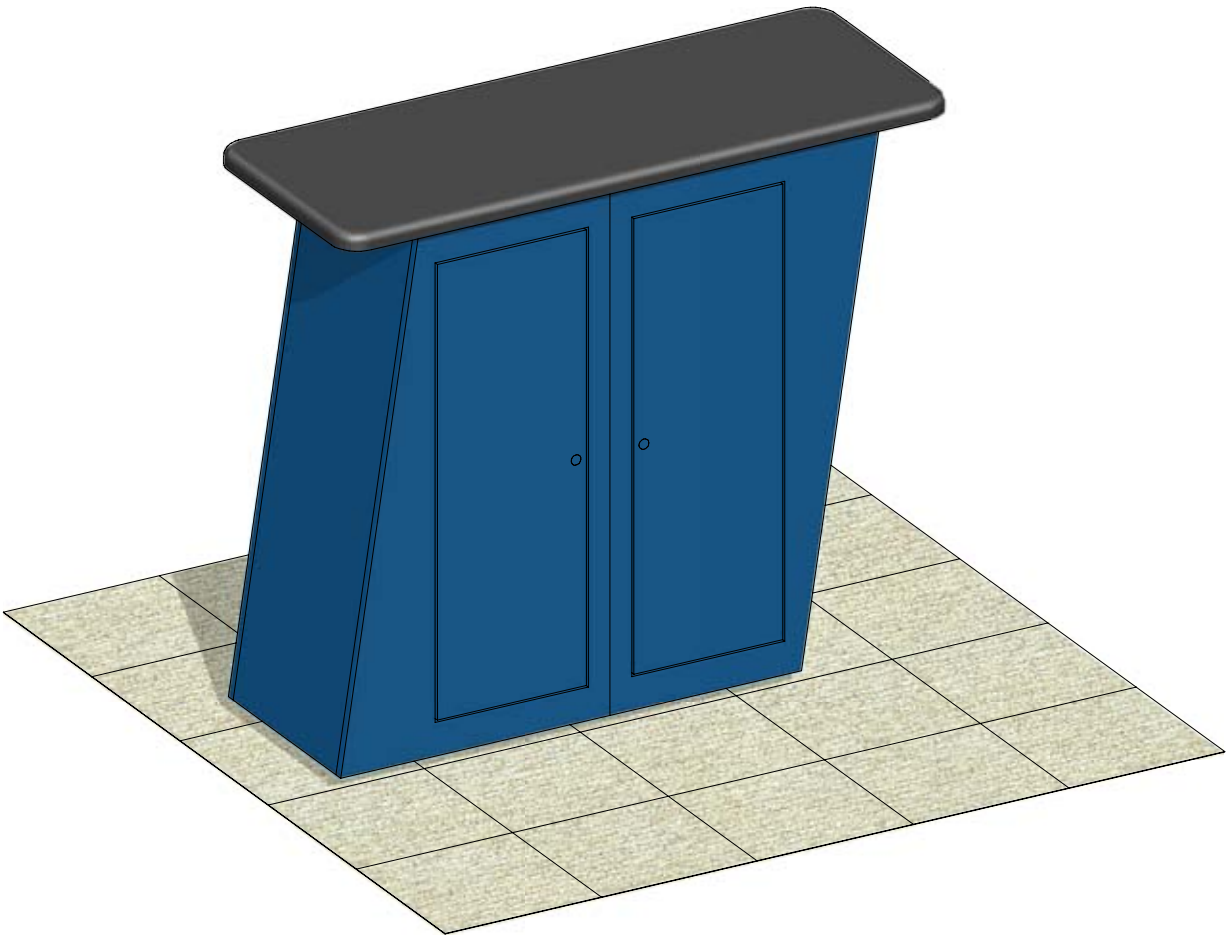



Step 1.

Lock C5 into the PE on C3 and C1 using the detail below. Lock C6 into the PE on C4 and C2 using the detail below. Push both completed halves of the counter together and secure by sliding the L180Ns into the channels as shown in detail below.

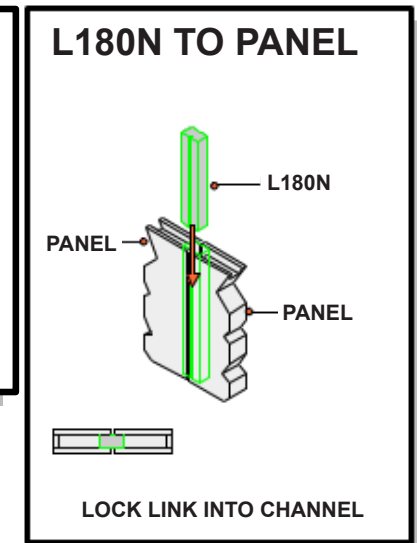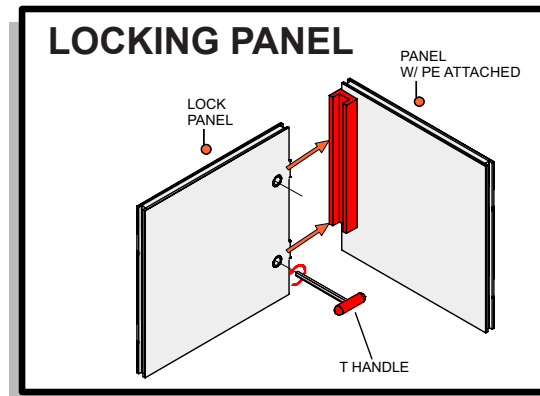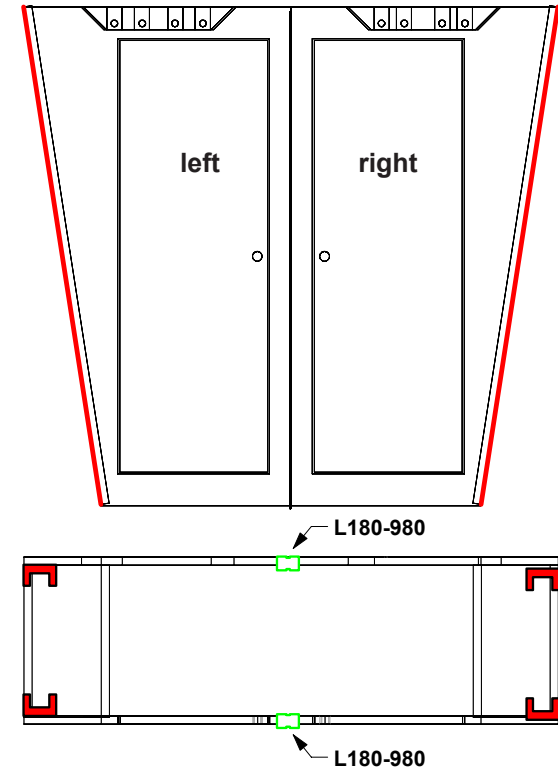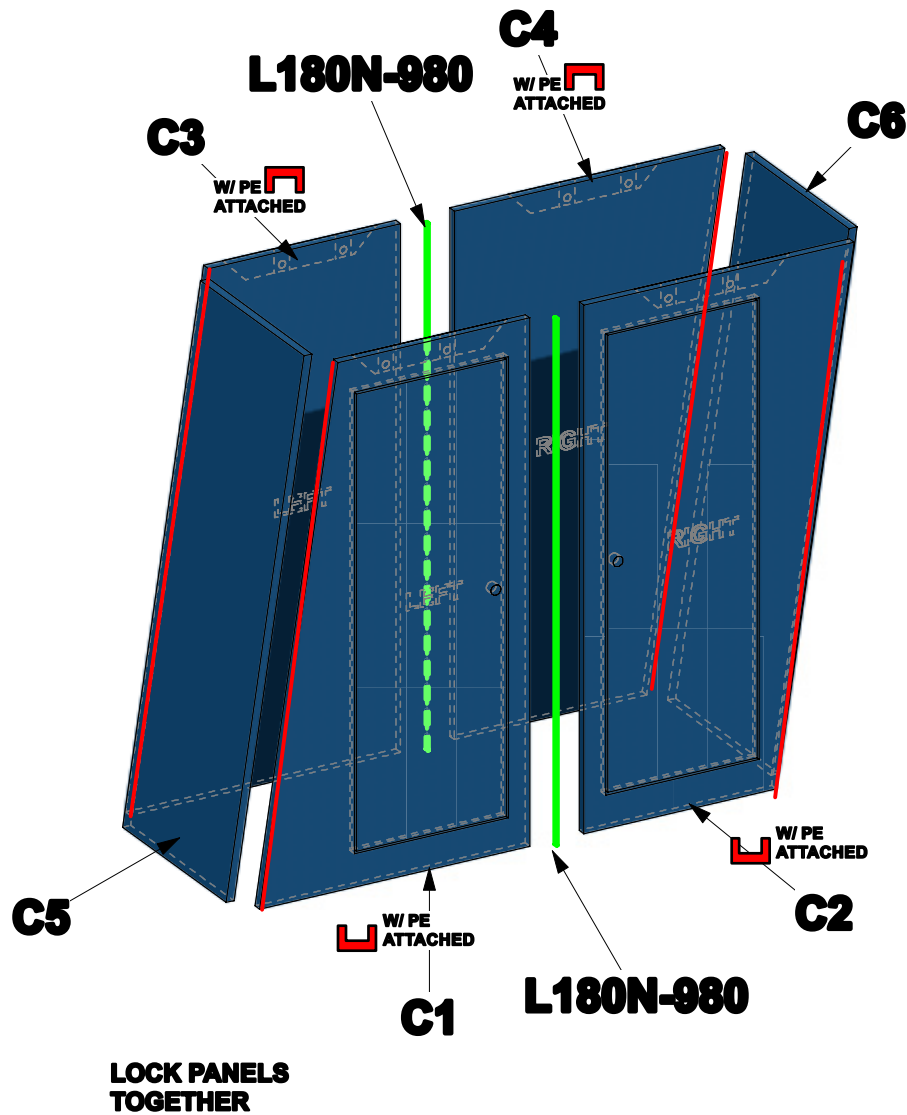


Step 2.

Place C7 top onto base. Open the doors and lock top to base using detail below.

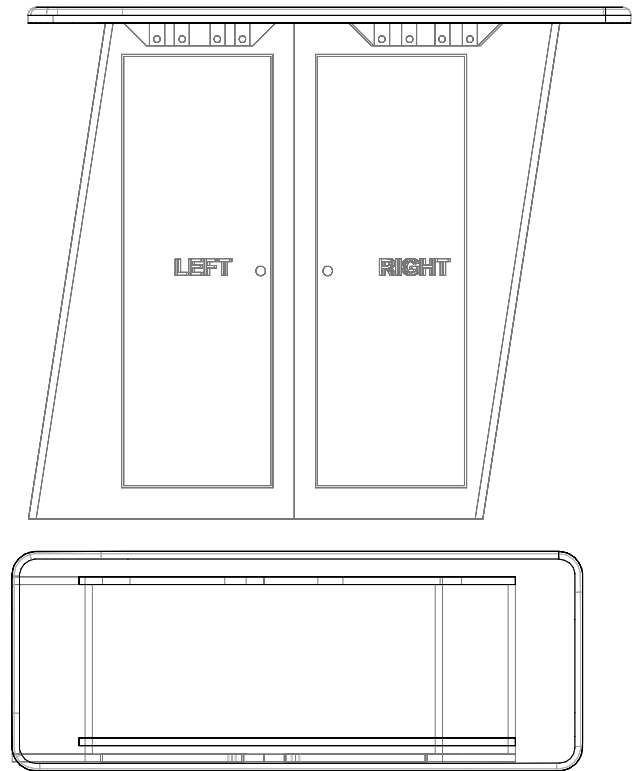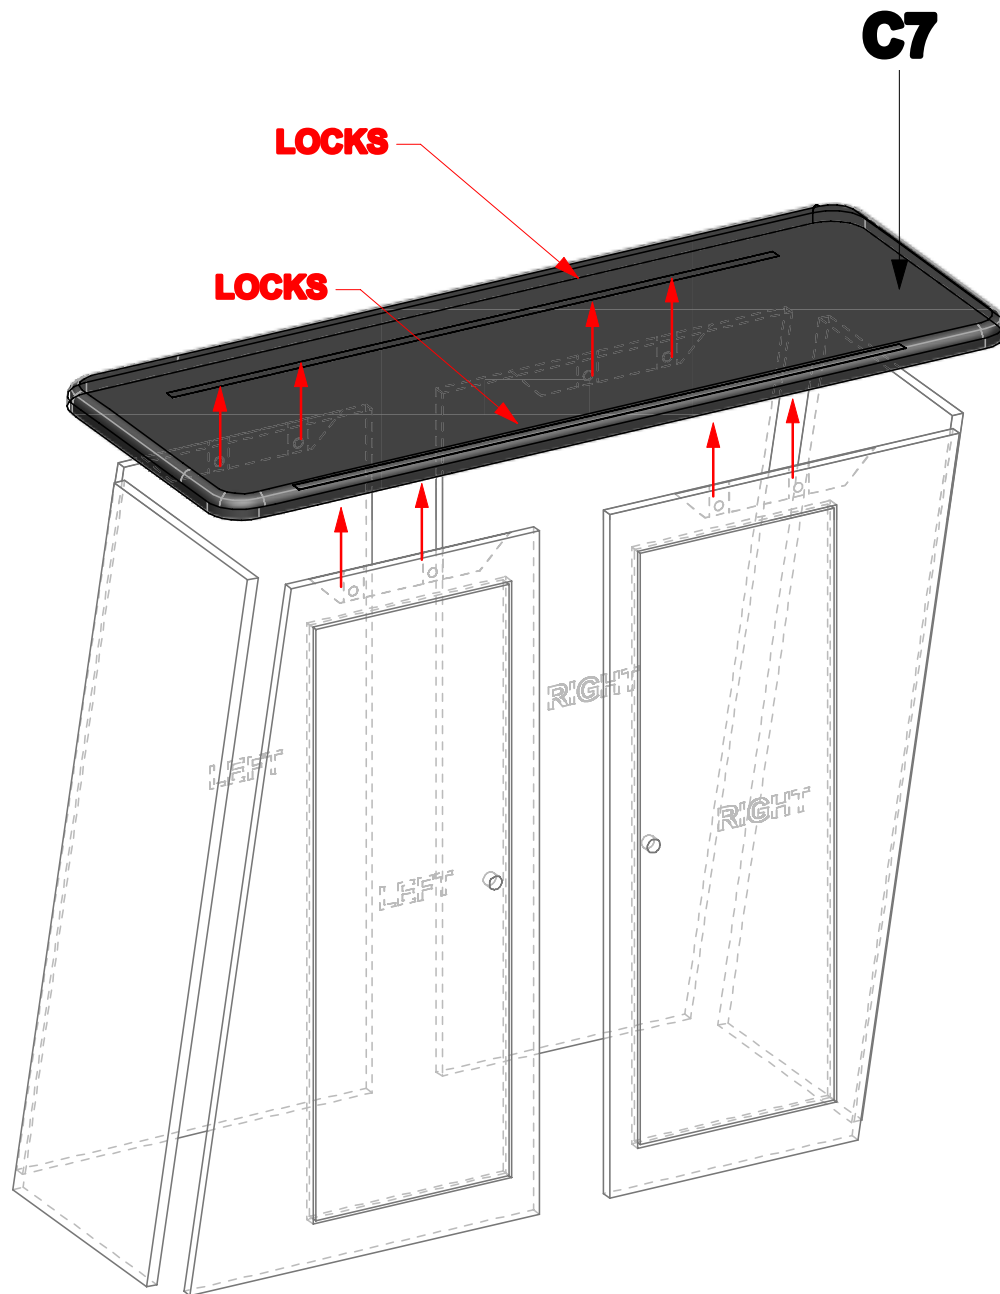

TOP TO BASE LOCK

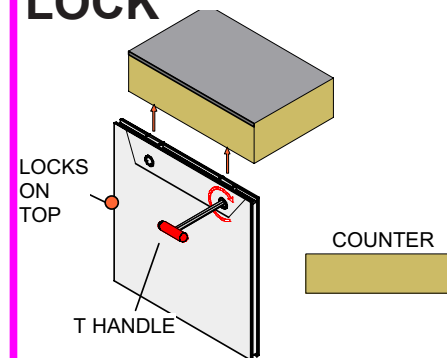

Lock Panel by using
T handle tool.