
BrightLine





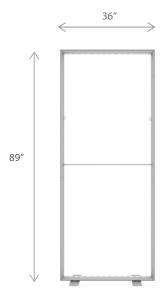

PRODUCT DESCRIPTION

BrightLine smart light box displays feature swift tool-free installation, durable light-weight frames, embedded LEDs, and exclusive One Planet recycled fabrics with impressive vivid graphics, all conveniently organized in a heavy-duty shipping case. Panel B3 elevates the traditional banner stand into an illuminated eye-catcher, with a compact foot-print perfect for retail stores or traveling sales teams. Paired with an optional TV mount, it's the ultimate dynamic display.

Mix-and-match with other BrightLine panels, or combine with WaveLine and SharpLine displays, to create unique branded environments.

KEY FEATURES

- · Easy tool free assembly
- Lightweight portable
- construction
- Magnetic power links
- LED lights encapsulated in frame
- Heavy duty shipping case, molded foam inserts
- · Single- or double-sided
- Vibrant graphics on recycled fabric

DISPLAY CONSTRUCTION

Aluminum frame with aluminum support poles

	DIMENSIONS		
	Assembled Unit	36"w x 89"h x 4"d	
	Packed Case	46.5"w x 15"h x 8.7"d, 40 lbs	
	Shipping Box	47"w x 16"h x 10"d, 42 lbs	
	Graphic Size	36"w x 89"h	

LED LIGHT SPECIFICATION	ONS
Power Requirements	64 W
CCT (Color Temp)	6000 K
Voltage Input	110 / 220V
Voltage Output	24V 4A 96W
Transformers Included	1

GRAPHIC MATERIAL		
Graphic Print : Dye sublimated on One Planet, 100% recycled, backlit fabric	Bottles recycled 24	
Blocker : One Planet light block recycled fabric	Bottles recycled 10	

GRAPHIC FINISHING Silicone sewn edges


WARRANTY


Limited Warranty Periods


Frame: LifetimeLights: 90 daysGraphics: 30 days





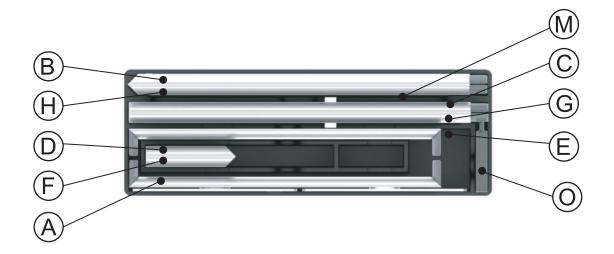

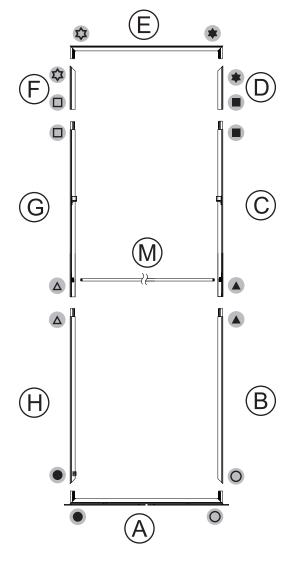






ASSEMBLY


Assemble parts on the floor and stand-up unit when completed.














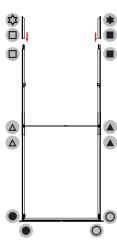



2










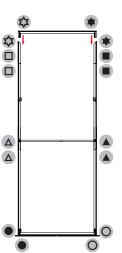



BrightLine

Push the silicone bead into each corner of the frame with your thumb.

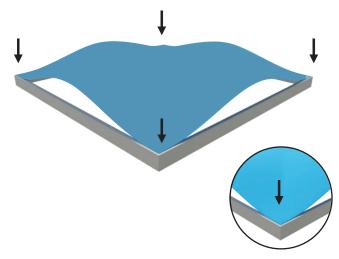

Push the siliconebead into the middle of the run and work your way around the perimeter of the frame until all beading is pushed in properly

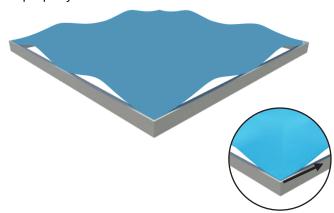

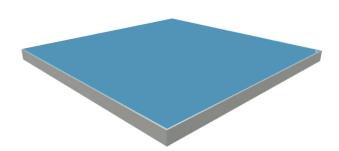



To Remove Graphic

Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter



